

HSF


NOTES:

Rated Current: 1A
 Rated Voltage: 50V AC/DC
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/Minute
 Insulation Resistance: 100MΩ min
 Operation Temperature: -25°C to +85°C
 Material: PA66 UL94V-0

Ordering Information

WF1006 - H XX X 0 1

No. of pins Color Packing
 12PIN E=Beige 0=PE Bag
 16PIN W=White
 20PIN B=Black
 30PIN N=Brown
 40PIN
 50PIN

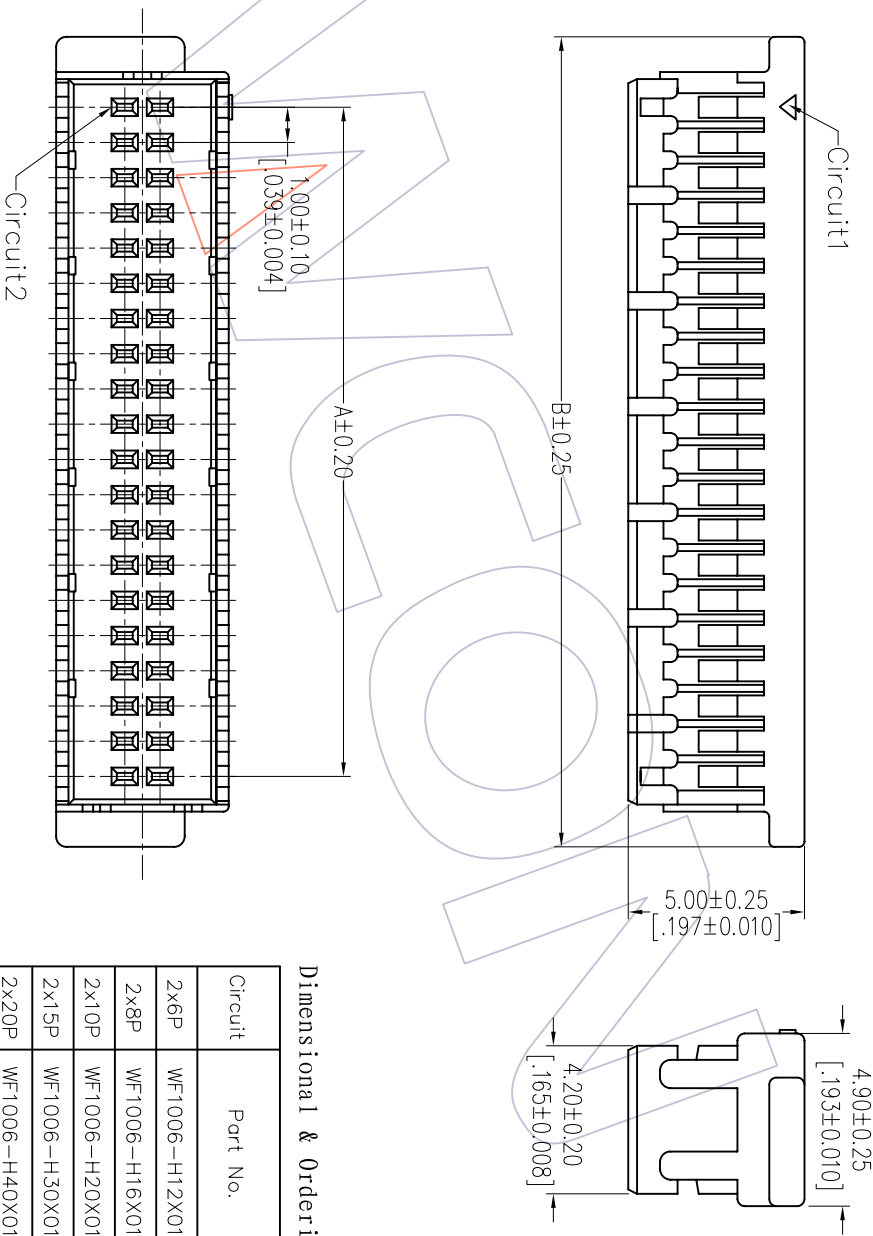

Dimensional & Ordering Information

Circuit	Part No.	Dimension		Q'ty/bag
		A	B	
2x6P	WF1006-H12X01	5.00	9.00	1,000
2x8P	WF1006-H16X01	7.00	11.00	1,000
2x10P	WF1006-H20X01	9.00	13.00	1,000
2x15P	WF1006-H30X01	14.00	18.00	1,000
2x20P	WF1006-H40X01	19.00	23.00	1,000
2x25P	WF1006-H50X01	24.00	28.00	1,000

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
AO	2012/09/01	NEW		XX ±0.40	JYHuang	2012/09/01	UNIT mm		SEE TAB
				X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 1. 00 HOUSING
				X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'	PROJ.				
				DIM TOL					

WCON

WCON-Dongguan WCON-Kunshan
 Http: www.wcon.com
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: sales@wcon.com