

HSF

NOTES:

- Current Rating: 3.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 1000V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze
- Contact plating: Au Or Sn over Ni
- Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information

2150 - 3 XX S XX CUN X 1

- No. of Pins per Row: 30-40PIN
- Contact Plating: G0=Gold Flash, G3=10μ"Gold, G4=15μ"Gold, G5=30μ"Gold
- S0=Gold Flash/Tin, S3=10μ"Gold/Tin, S4=15μ"Gold/Tin, S5=30μ"Gold/Tin
- SN=Tin, SM=Matte Tin
- Packing: T=Tube

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

REV	DATE	MODIFICATION DESCRIPTION
A0	2012/08/06	NEW

OPERATION	DRAW	DATE
XX	JYHuang	2012/08/06
XX	CHECK	DATE
X.XXX	±0.25	
X.XXX	±0.15	
Angle	± 3°	
APPROVE	DATE	

SCALE	FIT	PART NO.
UNIT	mm	2150-3XXSXXCUNX1
SIZE	A4	TITLE:
SHEET	1/1	PH2.54 THREE ROW 180° DIP H=5.0
PROJ.		Customer NO.


CHANGE	DIM	TOL

WCON



Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com

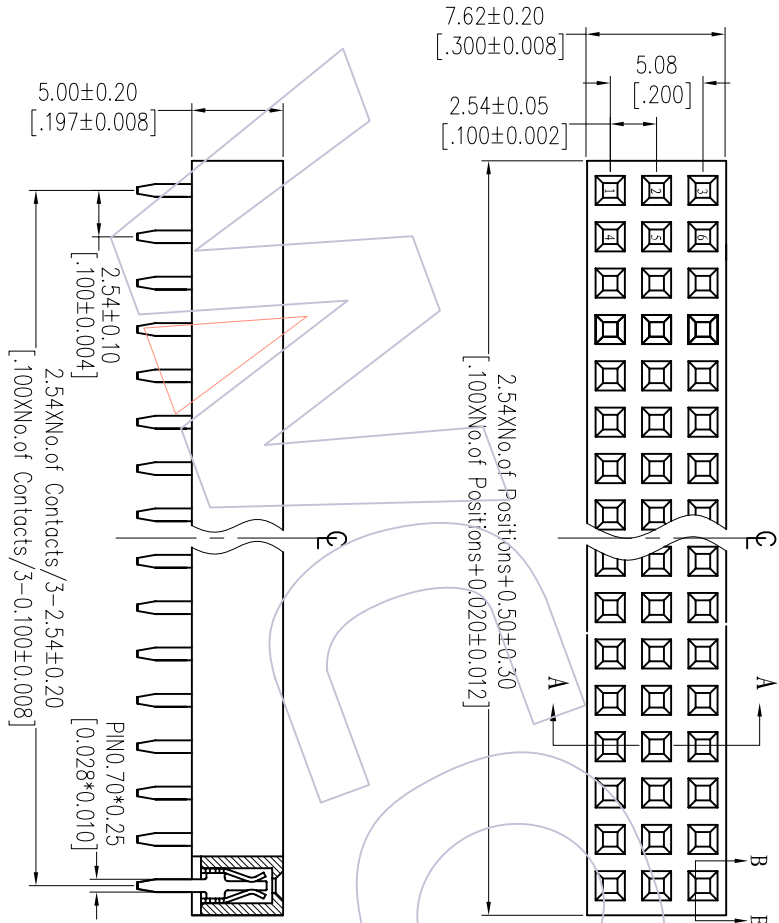

SECTION: B-B

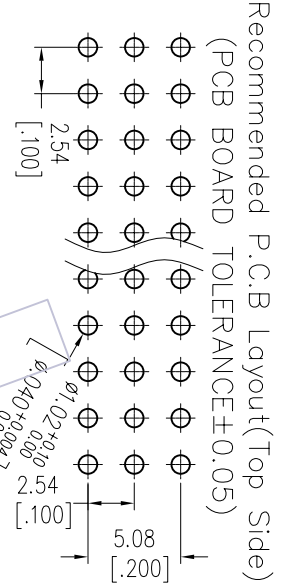

SECTION: A-A